



Preparation of water using Electrochemical Processes

Madars Reimanis*, Juris Malers and Jurijs Ozolins
Riga Technical University, Faculty of Materials Science and Applied Chemistry, Riga, Latvia,
*Corresponding author email:madars.r@inbox.lv

Abstract

The effect of electrolysis and electro dialysis processes on iron and calcium ion concentration and the development of microorganisms in water were studied in this work. Experiments were conducted under laboratory conditions using model solutions containing iron and calcium ions. Bacteria *Pseudomonas fluoresces* were used as model organism for disinfection experiments. It was found that the solution electrolysis with successive filtration through quartz sand reduces total iron ion concentration 40 - 50 times. If the current intensity applied to the electro dialysis cell is increased, the total amount of iron ion concentration reduced in the solution and the specific work of the process increased also. The calcium and total iron ion concentration in FeSO_4 and CaCO_3 containing solution decreased during electro dialysis. Rapid concentration decrease was observed at the beginning of the process. Electrolysis (to remove iron) of water solution containing at least 1 mmol/L of chloride ions also significantly improved the microbiological situation. No bacteria *Pseudomonas fluoresces* colony forming unit development in electrolyzed water within five days was found. Using water electro dialysis it is possible to efficiently desalinate solution. The development intensity of bacteria *Pseudomonas fluoresces* colony forming units in desalinated water is significantly reduced (as far as 1500 times).

Keywords: Demineralization, calcium and iron ions, *Pseudomonas fluoresces*.

1. Introduction

In many technological processes the quality of water is of utmost importance. Water in Latvia is usually characterized by high mineral content, hardness and presence of iron ions [1]. This may cause deposition of various substances on surfaces of pipes and equipment [2]. Water should not be corrosive and should not contain organic or inorganic substances that promote the growth of biofilms. The growth of biofilms changes various physical (smell, taste, colour), chemical and biological (biomass and the amount of microorganisms increase) properties. The growth of biofilms within water supply system promotes partial blockage of the pipes [3].

Several methods of water treatment are used: filtration, precipitation, adsorption, photo catalysis, chemical disinfection, etc. Electrochemical methods have a considerable potential - electrolysis (EL) and electro dialysis (ED); these methods can be combined with other water treatment methods [4, 5]. There is not enough research that explores the possibilities to use these methods to decrease hardness, iron ion content and the amount of substances that are necessary for development of microorganisms. Additionally during EL disinfectant substances that lessen the development of microorganisms may be formed [6, 7, and 8].

The aim of this work was to research the influence of EL and ED on iron and calcium ion concentration and the development of microorganisms in water. The experiments were conducted under laboratory conditions using model solutions containing iron and calcium ions. The influence of water treatment methods on the development of microorganisms was investigated using bacteria *Pseudomonas fluoresces* as model microorganisms.

2. Materials and Methods

2.1 Model solutions

The model solution containing bivalent iron ions with concentrations 0 – 1.5 mg/L was obtained by dissolving $\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$ in water; such concentrations are characteristic of waters in Latvia [1].

The model solution containing calcium ions was obtained by dissolving, 0.596 mmol/L CaCO_3 in water, which is saturated with CO_2 gas.

To assess the influence of treatment on the intensity of propagation of microorganisms in water a culture medium and conditions beneficial for the development of microorganisms were used [9]. At first a stock solution containing 4.55 g/L $(\text{NH}_4)_2\text{SO}_4$, 0.2 g/L KH_2PO_4 , 0.1 g/L $\text{MgSO}_4 \cdot 7\text{H}_2\text{O}$, 0.1 g/L $\text{CaCl}_2 \cdot 2\text{H}_2\text{O}$, 0.1 g/L NaCl , 2.27 g/L $\text{CH}_3\text{COONa} \cdot 3\text{H}_2\text{O}$ was made from distilled water.

Preparation of water using Electrochemical Processes

This solution then was diluted with distilled water (1:1000) and treated in autoclave for 45 min in 122°C. Before use prepared solution was cooled to room temperature.

2.2 Bacterial strains and culture conditions

Overnight culture of 2 days old *Pseudomonas fluorescens* MSCL 629 grown on R2A agar (LAB M, UK) at 22±0.5 °C were re-suspended into small amount of sterile distilled water. The suspensions were used further in the experiments on the same day.

2.3 Samples for microorganism development research

Model solutions were poured into sterile containers and bacteria suspension was added using micropipette. Then containers were covered with aluminium foil and incubated at 22 ± 0.5°C. The amount of bacteria in the solution was determined using colony forming unit (CFU) number.

2.4 Determination of CFU number

The changes in development intensity of microorganisms were characterized using CFU number. CFU number was determined using R2A culture medium (LAB M, United Kingdom) and incubation at 20 ± 2°C temperature for 48h [10].

Iron ion concentration was determined using spectrophotometric method for determining iron ion concentration [11].

Calcium ion concentration was determined using volumetric method for determining calcium ion concentration [12].

2.5 Experimental procedure

EL of water was done in specially made electrolysis cell for water treatment under dynamic conditions with flow velocity 0.01 m/s (flow productivity 270 mL/min) (fig.1.).

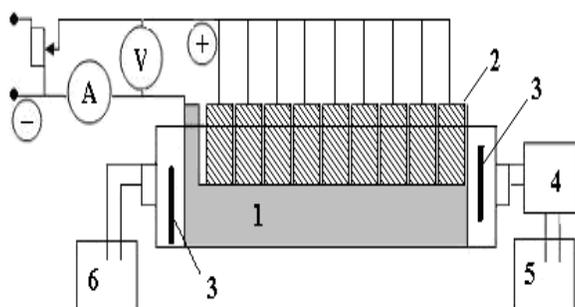


Fig.1. Experimental scheme for EL under dynamic conditions: 1 – stainless steel cathode, 2 – Ti_nO_{2n-1} containing ceramic anodes, 3 – partitions, 4 – pump, 5 – bowl with a stock solution, 6 – bowl with EL solutions

The volume of EL cell is 126 cm³. 9 anodes containing Ti_nO_{2n-1} with 112 cm² large total surface area

and a stainless steel cathode with 190 cm² large surface area. A rectifier SGS, BCA-5A-K (0 – 65V, 0 – 12 A) was used as a current source.

Model solutions containing iron ions after EL treatment were filtered through a column of quartz sand (particle size 0.5 – 1.5 mm).

Water treatment with ED was done in a specially constructed ED cell with four chambers. Solution was pumped into lower part of chambers using peristaltic pumps. Current intensity was measured with an ammeter connected with series circuit; voltage was measured with voltmeter connected with parallel circuit. The process was conducted under dynamic conditions and in circulating mode using 25 V voltages (fig.21.).

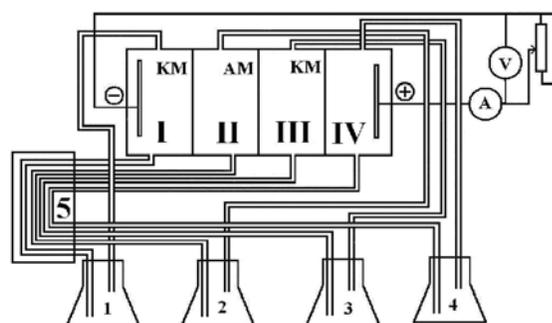


Fig.2. Experimental scheme for ED under dynamic conditions with recirculation: 1, 2, 3, 4 – bowls, 5 – peristaltic pumps; KM – cation-exchange membrane, AM – anion exchange membrane, A – ammeter, V – voltmeter, I, II, III, IV – chambers

Samples for analysis were taken from the third chamber of ED cell; cell construction ensures desalination of the solution in chambers 2 and 3 (with flow productivity 9.5 mL/min) and saturation of solution in 1 and 4 chambers (with flow productivity 5.5 mL/min).

3. Results and Discussion

Bivalent (Fe^{2+}) and trivalent (Fe^{3+}) iron ions in water can exist in various forms: soluted, suspended (colloids, precipitates and microorganism waste products) and as part of organic and inorganic compounds [13]. There exist several methods for iron removal most are based on Fe^{2+} oxidation in presence of air (oxygen) or different oxidizing agent; the precipitated non-soluble Fe^{3+} compounds then are filtered [14].



There is a considerable oxidation of Fe^{2+} to Fe^{3+} with oxygen soluted in water if the water containing iron ions is filtered through quartz sand (fig.3.). As the water flows through the sand a layer of iron oxides and hydroxides may form on quartz particles; this layer catalyzes oxidation processes of Fe^{2+} ions.

Preparation of water using Electrochemical Processes

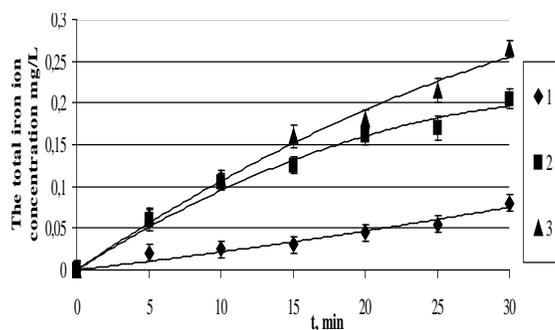


Fig.3 The total iron ion concentration change in the filtrate depending on the filtration time with different iron concentrations in the starting solution: 1 – 0.5 mg/L, 2 – 1.0 mg/L, 3 – 1.5 mg/L. Current intensity 0.09 A.

As the filtration period is increased, the total amount of iron ions in the filtrate increases as shown in fig 3. This tendency is more pronounced if the concentration of iron ions in initial solution is increased. This can be explained by the gradual saturation of the filtering medium.

The oxidation of ions may be intensified by EL. Oxygen that is released on anode in the EL process may function as oxidant. EL of the solution and the successive filtration can essentially reduce the amount of iron ions in the final solution (fig.4.).

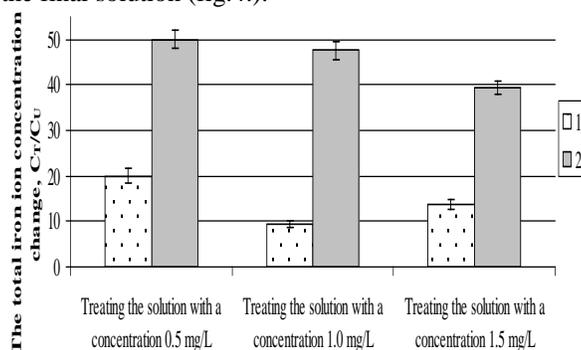


Fig. 4 The total iron ion concentration change in the investigated solutions: 1 – filtration through quartz sand, 2 – electrolysis followed by filtration through quartz sand. Filtration time 10 minutes, C_T, C_U - iron concentrations in the treated and untreated solution, mg/L current intensity 0.09 A

As it can be seen in fig.4 filtration through quartz sand decreases the amount of iron ions 20 times, but EL with successive filtration through quartz sand decreases the total amount of iron ion concentration 40 – 50 times. This can be explained by saturation of water with oxygen during EL process; only a part of the soluted oxygen is immediately used to oxidize iron ions. During filtration through quartz sand the increased oxygen concentration

promotes the oxidation of iron ions. If the iron ion concentration is increased in initial solution, the change in iron ion concentration in EL process is less pronounced.

The efficiency of the EL process depending on the current can be characterized by specific work required by the process:

$$A = I \cdot U \cdot t / \Delta m, \quad (2)$$

$$\Delta m = (W_i - W_e) \cdot V, \quad (3)$$

I – current intensity (A), U – current voltage (V), t – time (s), Δm – amount of released ions (mg; mmol), W_i – concentration of the released ions in initial solution (mg/L; mmol/L), W_e – the concentration of released ions in electrolysed solution (mg/L; mmol/L), V – amount of treated water (L).

As the total amount of iron ion concentration in initial solution is increased, the specific work required by EL process decreases (fig.5.).

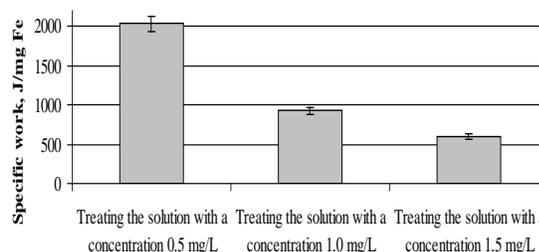


Fig.5 Specific work for total iron concentration reduction by electrolysis from iron ion concentration in initial solution current intensity 0.09 A

It is important to clarify the influence of current intensity on the decrease of iron ion concentration in EL process. If the current intensity is increased, more oxygen is released on anode; this intensifies the oxidation processes and the decrease of total iron ion concentration in electrolysed solution (fig.6.). At the same time the specific work required by the process increases. Successive water filtration through quartz sand after EL decreases the total amount of iron ion concentration 9 – 15 times.

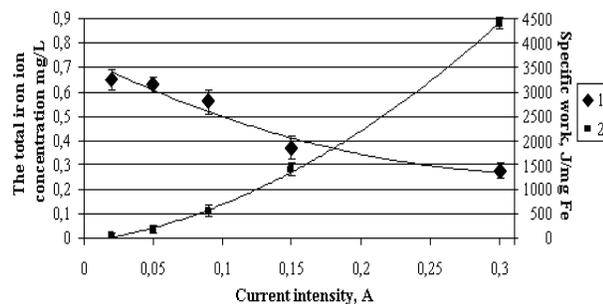


Fig.6 Total iron ion concentration change and specific work change depending on the current intensity of the electrolysis process: 1 – total iron ion concentration changes, 2 – Specific work for total iron concentration

Preparation of water using Electrochemical Processes

reduction. Total iron concentration in the starting solution – 1.5 mg/L

There is interest in water electro dialysis, because ED could not only decrease total iron ion concentration, but also decrease water hardness [15].

If CaCO_3 and FeSO_4 containing solutions are ED with recirculation conditions using 25V both iron and calcium ion concentration decreases if the treatment period is increased (fig.7.) in chamber 3 of the ED cell.

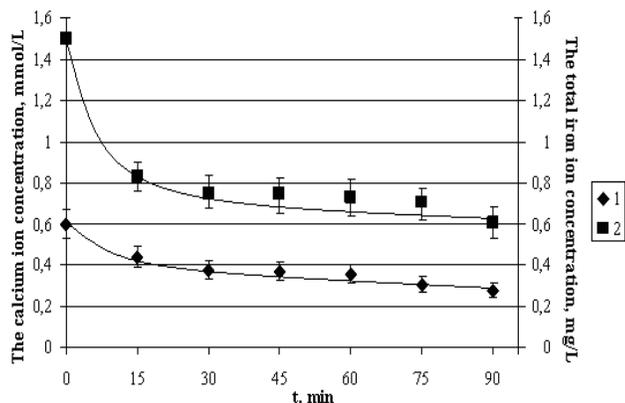


Fig.7 Change of calcium ion and total iron ion concentration during the ED process, with 25 V high voltage: 1 - calcium ions, 2 – iron ions

During the process concentration of Ca^{2+} ions decreases 2.2 times and total iron ion concentration decreases 2.5 times. The most rapid changes are observed in the beginning of the process.

The specific work depending on the current for ED process was determined in the same manner as for EL process. As it can be seen in fig.8 as the time of the process increases, the specific work also increases.

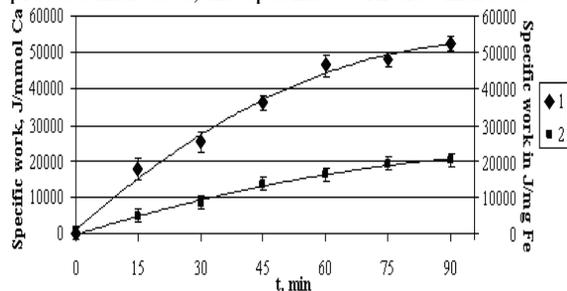


Fig.8 Specific work changes on electro dialysis process from the process time: 1 – calcium ion case, 2 – iron ion case. ED – circuit conditions with 25 V high voltages

In previous works [7, 8,] it was observed that, if the water is treated with electrolysis using $\text{Ti}_n\text{O}_{2n-1}$ containing ceramic anodes, there is a marked decrease in the ability of microorganisms to proliferate. This was explained by chlorine being formed during EL process; chlorine has

bactericidal properties. The development of microorganisms can be lessened by reducing the amount of nutrients in water; this reduces the increase of total mass of microorganisms [16, 17]. In this work the effect of EL and ED under dynamic conditions on the ability of microorganisms to proliferate. A model solution containing culture medium for bacteria *Pseudomonas fluoresces*, Fe^{2+} ions (as FeSO_4) and chorine ions was treated with ED and EL. The electrolysed solution contained 1.5 mg/L iron ions and 1 mmol/L chloride ions. The influence of ED was determined by treating model solution in electro dialysis apparatus for 15 min in circulation mode (fig.9.).

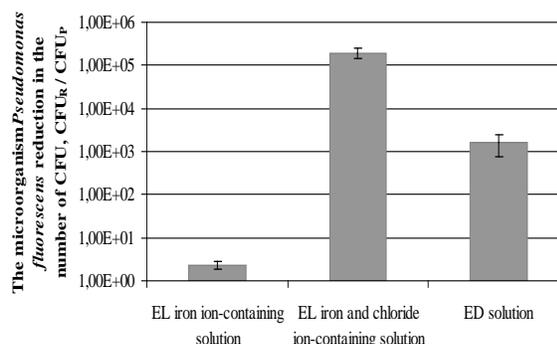


Fig.9 Microorganism *Pseudomonas fluoresces* CFU change after treatment (raw/processed)

As it can be seen in fig.9 if a model solution does not contain chloride ions, CFU number of *Pseudomonas fluoresces* is nearly constant; if chloride ions are added to model solution, there is a very marked change in CFU number. In the solution treated with electro dialysis after five days the CFU number is reduced more than 100 000 times – practically equals zero. It was observed that if 0,09 A current is used up to 1 mg/L chlorine can be released, which is enough to disinfect water. A marked decrease of microorganism growth is observed in solution treated with ED. In solution treated with ED after five days the CFU number has decreased for more that 1500 times. This can be explained by reduction of nutrient amount necessary for microorganism growth in the desalinated water.

4. Conclusions

Electrolysis of water under dynamic conditions and successive filtration substantially reduces the amount of iron ions in the solution. Specific work decreases if the concentration of iron ions in the initial solution is increased; if the current intensity is increased, the amount of iron ions is reduced, but the specific work of the process increases. Iron removal using electrolysis method significantly improves microbiological condition of the treated water if it contains at least 1mmol/L of chloride ions. In water treated with electro dialysis during five

Preparation of water using Electrochemical Processes

days there is no development of colony forming units of bacteria *Pseudomonas fluoresces*. It is possible to efficiently desalinate solution. In the desalinated water there is a marked decrease (up to 1500 times) in intensity of development of colony forming units of bacteria *Pseudomonas fluoresces*.

References

1. Public Health Agency, Latvia, 2008, Review of the quality of drinking water in 2008, http://vi.gov.lv/doc_upl/dzarama_udens_mionitorings_2008.pdf/ (10.05.2010), (in Latvian).
2. Liu, T, Li, X, Wang, H, Sun, X, 2002, Formation process of mixed fouling of microbe and CaCO₃ in water systems, *Chemical Engineering Journal*, 88, p249–254.
3. Hallam, N.B, West, J.R, Forster, C.Fand Simms, J, 2001, The potential for biofilm growth in water distribution systems, *Wat. Res.*, 35(17), p4063–4071.
4. Feng, C, Suzuki, K, Zhao, S, Sugiura, N, Shimada, S, Maekawa, T, 2004, Water disinfection by electrochemical treatment, *Bioresource Technology*, 94, p21–25.
5. Watts, R.J, Wyeth, M.S, Finn, D.D, Teel, A.L, 2008, Optimization of Ti/SnO₂–Sb₂O₅ anode preparation for electrochemical oxidation of organic contaminants in water and wastewater, *J. Appl. Electrochem*, 38, p31–37.
6. Drees, K.P, Abbaszadegan, M, Maier, R.M, 2003, Comparative electrochemical inactivation of bacteria and bacteriophage. *Water Research*, 37, p2291–2300.
7. Reimanis, M, Ozolins J, Malers J, 2008. Possibilities to decrease microbiological pollution of the water by using electrolysis with TiO_x ceramic electrodes, The Scientific Proceedings of Riga Technical University, Material science and applied chemistry, 18, p90-96. (in Latvian).
8. Reimanis, M, Ozoliņš, J, Mālers, J, Nikolajeva, V, 2009, Influence of various physical-chemical treatment methods on microbial growth in water. In: Proceedings of 7th International Conference "Environment. Technology. Resources". Rezekne Higher Education Institution Press, Rezekne, 2, p71-77
9. Lehtola, M.I, Miettine, I.T, Vartiainen, T, and Martikainen, P.J, 1999, A new sensitive bioassay for determination of microbially available phosphorus in water, *Appl. Environ. Microbiol.* 65, p2032-2034.
10. Reasoner, D.J, Geldrich, E.E, 1985, A new medium for the enumeration and subculture of bacteria from potable water, *Appl. Environ. Microbiol.* 49, p1-7..
11. ISO 6332:1988, „Water quality - Determination of iron - Spectrometric method using 1,10-phenanthroline
12. ISO 6059:1984 „, Water quality - Determination of the sum of calcium and magnesium - EDTA titrimetric method.”
13. Ghosh, D, Solanki, H, Purkait, M.K, 2008, Removal of Fe(II) from tap water by electrocoagulation technique, *Journal of Hazardous Materials*, 155, p135–143.
14. Das, B, Hazarika, P, Saikia, G, Kalita, H, Goswami, D.C, Das, H.B, Dube, S.N, Dutta, R.K, 2007, Removal of iron from groundwater by ash: A systematic study of a traditional method, *Journal of Hazardous Materials*, 141, p834–841.
15. Kabay, N, Demircioglu, M., Ersöz, E, Kurucaovali, I, 2002, Removal of calcium and magnesium hardness by electro dialysis, *Desalination*, 149, p343-349.
16. Kapellos, G.E, Alexiou, T.S, Payatakes, A.C, 2007, Hierarchical simulator of biofilm growth and dynamics in granular porous materials, *Advances in Water Resources*, 30, p1648–1667.
17. Chu, C, Lu, C, Lee, C, 2005, Effects of inorganic nutrients on the regrowth of heterotrophic bacteria in drinking water distribution systems, *Journal of Environmental Management*, 74, p255–263